




Steel Pipe

[P]

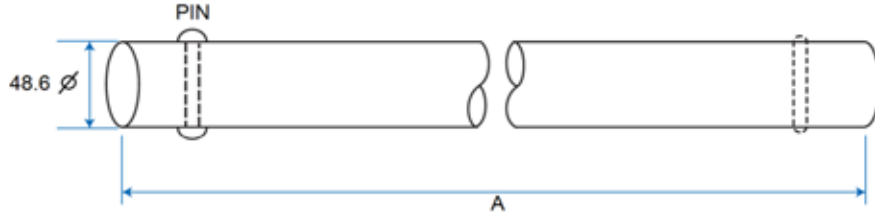

P. Code	Type	A (mm)	Weight (kg)
SP10	-	1,000	2.73
SP15	-	1,500	4.10
SP20	-	2,000	5.46
SP25	-	2,500	6.83
SP30	With Pin	3,000	8.19
SP35	With Pin	3,500	9.56
SP40	With Pin	4,000	10.9
SP45	With Pin	4,500	12.3
SP50	With Pin	5,000	13.6
SP55	With Pin	5,500	15.0
SP60	With Pin	6,000	16.4

Steel Clamp

[Q]

P. Code	Type	Weight (kg)
BC1	Fix	0.7
BC3	Swivel	0.7




H-Steel Frame Clamp

[R]

P. Code	Type	Weight (kg)
HX	Multi	1.3
H23	Swivel	1.1


35 mm or Below

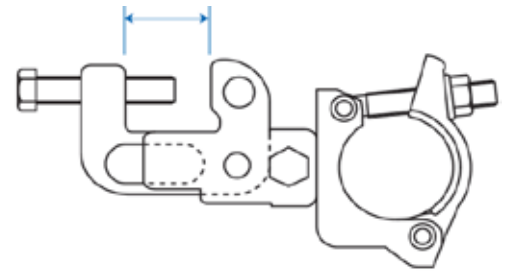

Pipe Joint

[S]


P. Code	Weight (kg)
B20	0.5

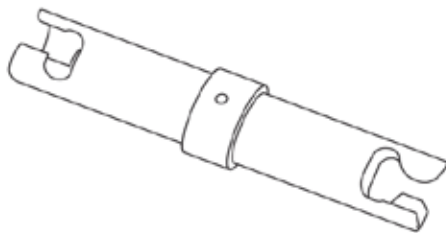

Pipe Base

[T]


P. Code	Weight (kg)
B15	0.7



Adjustable Step Board

[U]

P. Code	Weight (kg)
CBS	6.0

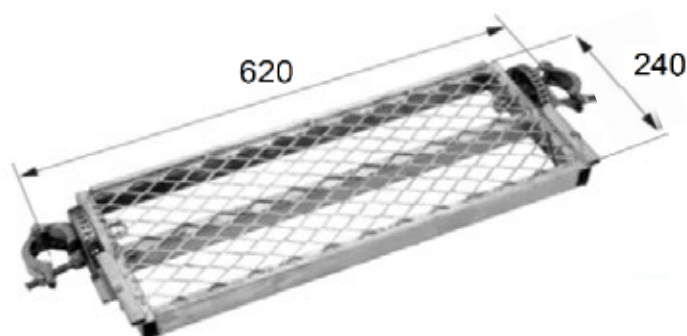




Steel Plank

[V]

P. Code	L (mm)	T (mm)	Weight (kg)
CT10	1,000	40	3.6
CT20	2,000	40	7.2
CT30	3,000	40	10.6
CT40	4,000	40	13.9

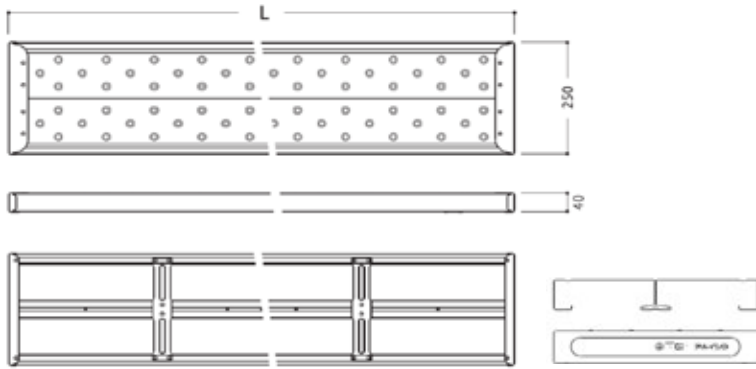


- The allowable load is only valid for supporting intervals not more than 1.800 mm
CLT40 and CLT30 must be used with three point

Expandable Bracket

[W]

P. Code	A (mm)	B (mm)	C (mm)	Weight (kg)
DS57X	492	721	350	6.1
DS35X	294	482	300	4.6

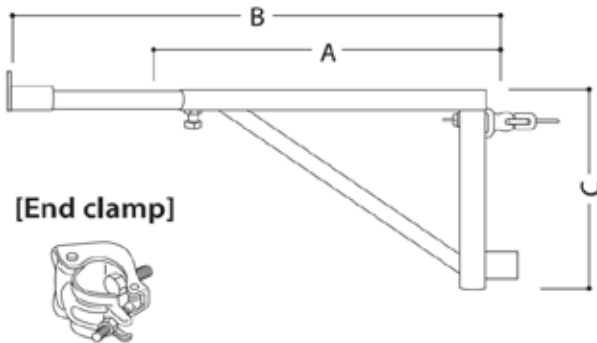

Caster with Jack

[X]

Single Ladder

[Y]

P. Code	A (mm)	B (mm)	Weight (kg)
BL8	200	300	8.7

P. Code	L (mm)	Weight (kg)
CS30	3,070	8.8
CS40	4,060	6.8

